




LM Guide with Linear Encoder

SHS-LE

Enables Compact Machine Designs

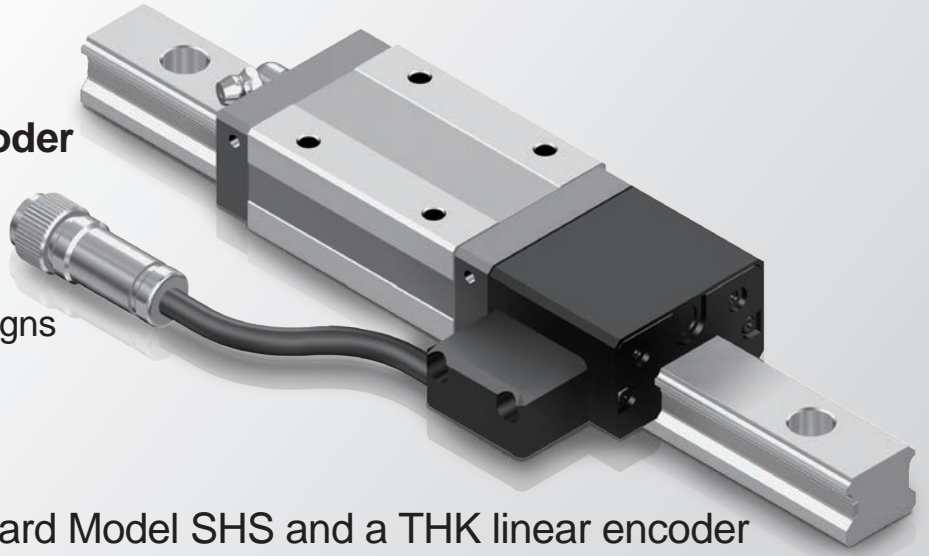


- Combines the global standard Model SHS and a THK linear encoder
- Makes design and assembly easier (see below)
- Enables compact machine designs (see below)

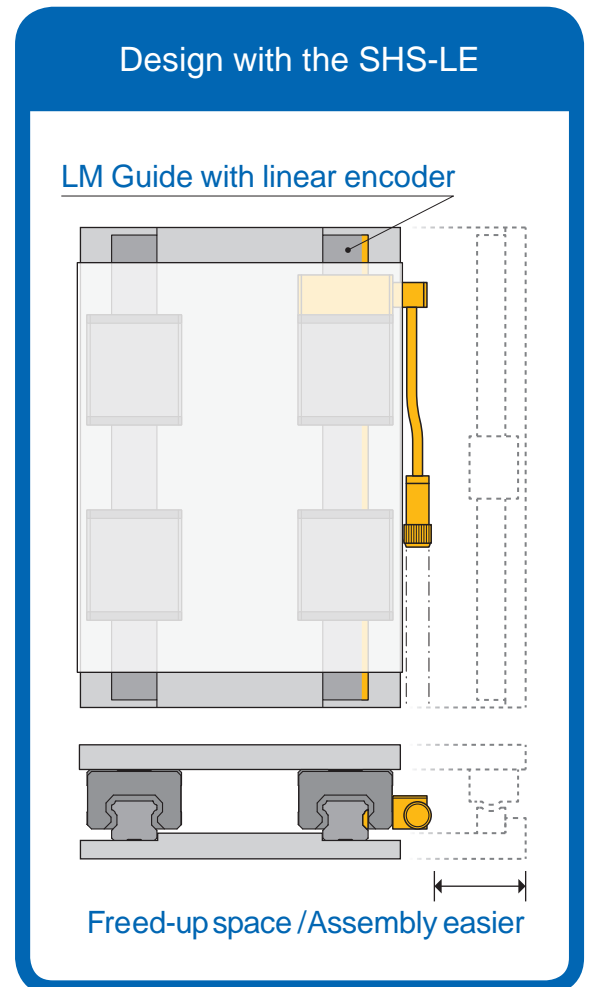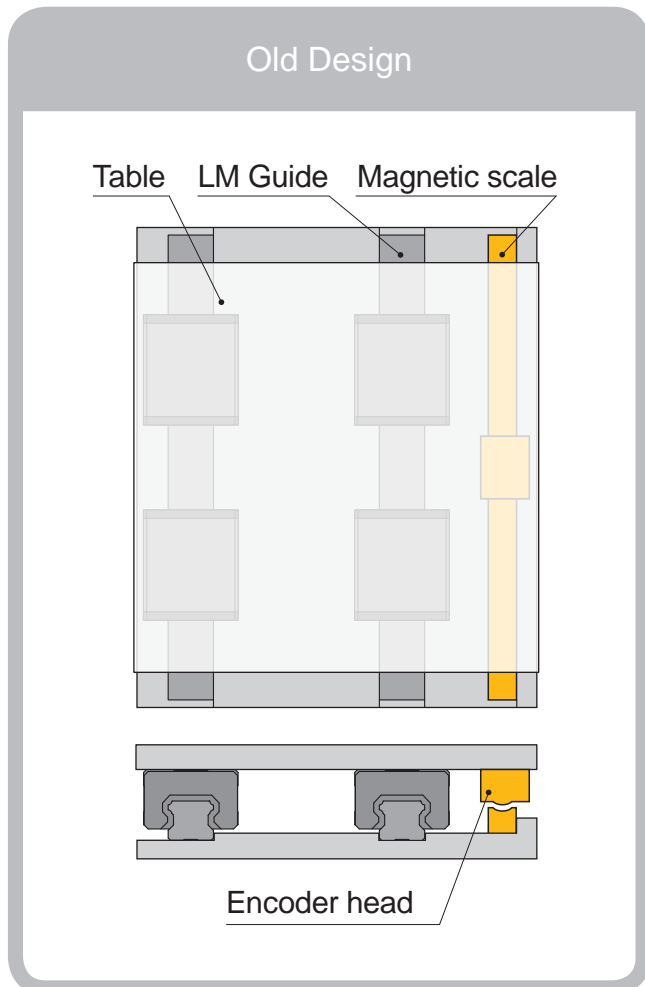

The images are illustrative examples of LM Guide installations.

- Makes design and assembly easier because magnetic scale is not required
- Enables compact machine designs


Components/Structure

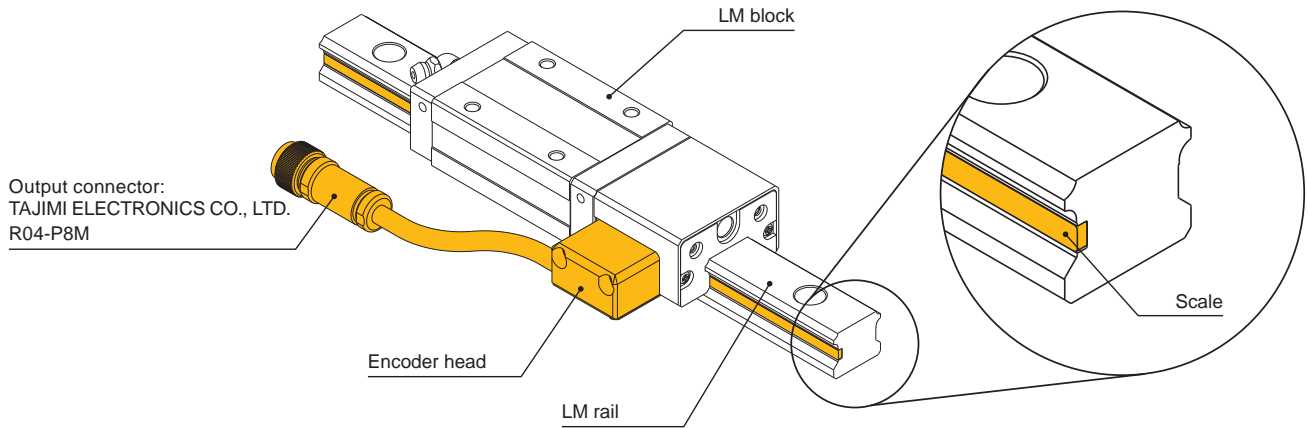

Shapes of Connector and Pin assignment

Pin assignment		Pin signal	
Encoder	Extension cable (output side)	Encoder	Extension cable (output side)
A	1	A=+5V	2=SG
B	2	B=PA	5=/PB
C	3	C=/PA	6=/PA
D	4	D=SG	7=+5V
E	5	E=PB	8=+5V
F	6	F=/PB	9=SG
G	7	G=	13=PB
H	8	H=FG	14=PA

Dimensions/Lineup

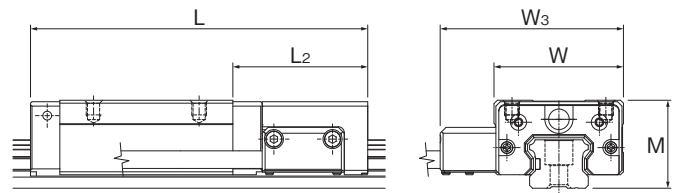

Unit: mm

Linear Encoder Specifications

Encoder	Incremental magnetic encoder
Resolution (μm)	1/5/10
Positioning repeatability	± Resolution or less
Power supply	5V ± 5%
Output	Incremental A-B phase differential output EIA-422 line driver
Encoder head protection rating	IP67
Cable length (mm)	500 (extension cables are available)
Standard compliance	CE

Model No.		Height M	Width		Length	
			W	W ₃	L	L ₂
SHS20LE	C (LC)	30	63	72	115(134)	46
	V (LV)	30	44	62.5	115(134)	46
SHS25LE	C (LC)	36	70	76.3	129(146)	47.5
	R (LR)	40	48	65.3	129(146)	47.5
SHS30LE	V (LV)	36	48	65.3	129(146)	47.5
	C (LC)	42	90	88.3	143(168)	50
SHS35LE	R (LR)	45	60	73.3	143(168)	50
	V (LV)	42	60	73.3	143(168)	50
SHS45LE	C (LC)	48	100	96	162(192)	54.5
	R (LR)	55	70	81	162(192)	54.5
	V (LV)	48	70	81	162(192)	54.5
SHS45LE	C (LC)	60	120	111.3	180(214)	57
	R (LR)	70	86	94.3	180(214)	57
	V (LV)	60	86	94.3	180(214)	57

THK CO., LTD.

Headquarters 2-12-10 Shibaura, Minato-ku, Tokyo 108-8506 Japan

International Sales Department Phone: +81-3-5730-3860

www.thk.com

Singapore

THK LM System Pte. Ltd. Phone: +65-6884-5500

Thailand

THK RHYTHM (THAILAND) CO., LTD. LM System Division

● Bangkok Branch Phone: +66-2751-3001

India

THK India Pvt. Ltd.

● Headquarters & Bengaluru Branch Phone: +91-80-2340-9934

● Pune Branch Phone: +91-72-7600-2071

● Chennai Branch Phone: +91-44-4042-3132

● Ahmedabad Branch Phone: +91-79-6134-4925

● Delhi Branch Phone: +91-12-4676-8695

South Korea

● Seoul Representative Office Phone: +82-2-3468-4351

China

THK (CHINA) CO., LTD.

● Headquarters Phone: +86-411-8733-7111

● Shanghai Branch Phone: +86-21-6219-3000

● Beijing Branch Phone: +86-10-8441-7277

● Chengdu Branch Phone: +86-28-8526-8025

● Guangzhou Branch Phone: +86-20-8523-8418

● Shenzhen Branch Phone: +86-755-2642-9587

● Xian Branch Phone: +86-29-8834-1712

THK (SHANGHAI) CO., LTD. Phone: +86-21-6275-5280

Taiwan

THK TAIWAN CO., LTD.

● Taipei Headquarters Phone: +886-2-2888-3818

● Taichung Office Phone: +886-4-2359-1505

● Tainan Office Phone: +886-6-289-7668

Europe

THK GmbH

● European Headquarters Phone: +49-2102-7425-555

● Düsseldorf Office Phone: +49-2102-7425-0

● Stuttgart Office Phone: +49-7141-4988-500

● U.K. Office Phone: +44-1384-471550

● Italy Office Phone: +39-02-9901-1801

● Sweden Office Phone: +46-8-445-7630

● Austria Office Phone: +43-7229-51400

● Spain Office Phone: +34-93-652-5740

● Turkey Office Phone: +90-216-362-4050

● Prague Office Phone: +420-2-41025-100

● Moscow Office Phone: +7-495-649-80-47

THK Europe B.V.

● Eindhoven Office Phone: +31-40-290-9500

THK France S.A.S.

● Paris Office Phone: +33-1-7425-3800

North America

THK America, Inc.

● Headquarters Phone: +1-847-310-1111

● Chicago Office Phone: +1-847-310-1111

● North East Office Phone: +1-631-244-1565

● Atlanta Office Phone: +1-770-840-7990

● Los Angeles Office Phone: +1-949-955-3145

● San Francisco Office Phone: +1-925-455-8948

● Detroit Office Phone: +1-248-858-9330

● Toronto Office Phone: +1-905-820-7800

South America

THK BRAZIL INDUSTRIA E COMERCIO LTDA.

Phone: +55-11-3767-0100